


METROPOLITAN



PUMP COMPANY

A Division of METROPOLITAN INDUSTRIES, INC.

37 FORESTWOOD DRIVE • ROMEOVILLE, IL • 60446-1343

(815) 886-9200

FAX (815) 886-4573

www.metropolitanind.com

QUOTATION

Page 1 of 1

PROJECT: Standby Generator
123rd St & 93rd Ave Lift Station
Palos Park, IL.

TO: Mr. Joe Walters - Palos Park Public Works

We are pleased to provide a QUOTE on the following equipment and services for the subject project.

| QTY | DESCRIPTION |
|-----|---|
| 1 | 25kW engine-driven standby generator – Natural Gas Fuel System * UL2200 listed * Digital control system including isochronous governor & voltage regulation * Selectable low-speed weekly exercise function * 2.4 liter liquid-cooled naturally aspirated engine * Alternator configured for 120/240 vac 3 phase 4-wire 60 Hz output * Natural gas fuel system with customer connection fitting * Weather protective sound attenuating steel enclosure with powder coat finish * Factory installed critical-grade exhaust system * 10 amp battery charger and coolant heater |
| 1 | Freight to Palos Park |
| 1 | Start-up Services |
| 1 | SCADA Integration (Gen Running, Gen Failure, ATS on Utility, ATS on Gen) |

Your COST for the above described equipment and services is:

\$19,981.00

Notes & Clarifications:

The Automatic Transfer Switch, Battery Charger Breaker and Block Heater Breaker are existing.

Not Included: Conduit, Wire, ATS, Feeder Breakers, Installation, Primary Natural Gas Regulator and Anything not listed above.

8693.64
~~\$28,674.64~~ *CFM*

TERMS: Net 30 days from date of invoice. All invoices are payable in full when due, with no retainage allowed.

THIS QUOTATION, SUBJECT TO THE CONDITIONS ON THE REVERSE SIDE HEREOF, MAY BE ACCEPTED ONLY BY SIGNING ONE COPY OF THIS QUOTATION AND RETURNING IT TO METROPOLITAN PUMP CO. NOT LATER THAN THE DATE INDICATED ON THE FACE HEREOF AFTER WHICH THIS QUOTATIONS IS VOID. THIS QUOTATION AFTER ACCEPTANCE BY BUYER MAY BE CANCELLED BY EITHER PARTY WITH NO PENALTY ONLY IF ENGINEER FAILS TO APPROVE SELLERS APPROVAL BROCHURE.

Accepted:

Firm:

By:

Title:

[Signature]
VILLAGE OF PALOS PARK
JOHN F. MAHONEY
MAYOR

Quotation No:

Submitted:

Void after:


Prepared By:

Keith011422MS

January 14, 2022

30 Days

Keith Girup

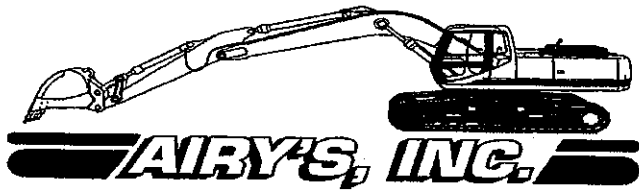

PROJECT PROPOSAL & CONTRACT

21825 Cherry Hill Road, Joliet, IL 60433
(708) 429-0660 www.airys.com (708) 429-0795

To:
Mr. Joe Walters
Village of Palos Park
8999 123rd St
Palos Park, IL 60464

Date: 1/21/2022
Job Number: E22-512
Job Name/Location
123rd Street & 93rd Avenue Generator Upgrade
123rd Street & 93rd Avenue
Palos Park, IL

Phone: 708-259-1331
Fax/e-mail: jwalters@palospark.org

We hereby submit specifications and estimates per plans dated: None

Set and Install Generator

Includes:

- Generator off-load.
- Generator mounting on existing concrete pad.
- Power wires between ATS and Generator.
- Signal wires between ATS and Generator.
- Battery charger wires between circuit breaker #4 and generator.
- Block heater wires between circuit breaker #5 and generator.
- Natural Gas Primary Regulator and associated piping / valves.

TOTAL BASE BID

\$8,693.64

The referenced amount reflects our Lump Sum bid for the referenced project

The following considerations are made as part of the bid and contract documents

- No permits, bonds, taxes, licenses, or fees
- Airy's and their subcontractors to be held harmless from utility construction in any areas requiring permit(s)/easements for construction.
- No filling existing structures
- No excavation of unsuitable rock or soils
- Downtime for unsuitable material, rock, etc. not included.
- On site and Off site restoration by others
- Staking & layout by others
- Exploratory excavation for utilities limited to those areas noted and scaled from plan
- Not responsible for re-routing/reconnection due to the confliction of utilities at crossings whether shown or not.
- Not responsible for determination of design crossing conflictions.
- Televising of existing or proposed sewers is not included unless expressly mentioned in this proposal.
- Vacuum testing of structures is not included unless expressly mentioned in this proposal.
- Contaminated groundwater/storm water handling or disposal is not included.
- Not responsible for the Excavation, Handling, Hauling, or Disposal of any contaminated soils. Airy's may work in other areas, or suspend construction until such material is removed or cleaned.
- Disposal of unsuitable materials not included.
- Owner to allow for the extension of time to the project in the event of revisions, additions, or the changes in the scope of the project without adverse effects to Airy's or their subcontractors.
- In the event soil erosion is provided in a bid line, we will provide the initial installation. Further maintenance is to be

provided by others.

- All spoil left on site at trench side. Approx.. Cy
- All services to terminate at property line.
- Dewatering is excluded.
- Rock excavation is excluded.
- Traffic control by others.
- Tree removal/trimming by others.
- The excavation through unsuitable soil is excluded.
- All pavement or curb sawing, removal, and disposal is excluded.
- Not responsible for damage to privately owned utility lines. Locating will be responsibility of the property owner.
- Average sanitary manhole depths are calculated at 0.0' , added manholes that vary in depth may require a change in unit price.
- Average storm manhole depths are calculated at 0.0' , added manholes that vary in depth may require a change in unit price.
- All water main depths are calculated with 5.0' cover, added depths may require a change in unit price.
- This Proposal is based on 2022 Labor Rates.

In the event another contract format is used, these pages shall be considered as an exhibit.

We propose to furnish material and labor - complete in accordance with the plans and specifications listed above:

This exhibit is for the sole purpose of determining value of installed utilities for the monthly payments and to determine the price of additions or deletions from the plans and specifications. It is agreed and understood by the parties hereto that all utilities covered under this contract shall be installed per plans and specifications as listed above for the completed price of:

| | | |
|---|---------|------------|
| Eight thousand six hundred ninety-three and 64/100----- | Dollars | \$8,693.64 |
|---|---------|------------|

Payment to be made monthly as work progresses, as billed, per units installed, no retention.

Net amount due by 10th of the month following month in which work was performed.

Should any other contract document be used, this form shall be considered an exhibit to the contract.

Should discrepancies between drawings, specs, and/or contract occur, scope of work noted in this document to supersede. All work to be in compliance with the Standard Specifications for Water and Sewer Main Construction in Illinois.

Any alteration or deviation from specifications involving extra costs will be executed only upon written order and will become an extra charge over and above the contract amount. All agreements contingent upon strikes, accidents, or delays beyond our control. Owner to carry fire, tornado, and other necessary insurance. Our workers are fully covered by Workmen's Compensation Insurance.


This proposal may be withdrawn by us if not accepted within 5 days due to the volatility of materials at this time.

Airy's Authorized Signature _____

Acceptance of Proposal

The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outlined above. All fees for collection including, but not limited to court costs, arbitrator fees, and attorney fees are the sole responsibility of the customer.

Date of Acceptance 2/14/22

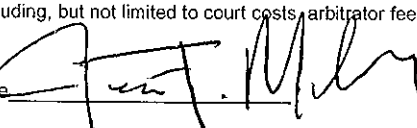Signature 

Signature _____